

CYL/H 1kW~3kW

1.0μm Single-Mode (Highly Reflective Metals) Continuous Fiber Laser

PRODUCT DESCRIPTION

CINA LASER CYL/H series high-brightness anti-high reflective single-mode 1.0μm continuous fiber laser, adopts latest industry technology and the optimization design, with high electro-optical conversion efficiency, high lifetime, high safety and reliability. The unit with high-quality output beam and strong capability on resisting high-reflective, can be widely used in all kinds of materials of laser cutting, welding, punching, 3D printing and other high-end smart manufacturing.




PRODUCT FEATURE

- ▶ High wall plug efficiency, greatly reduce power consumption
- ▶ Strong anti-high reflection ability, suitable for different material processing.
- ▶ Remote real-time monitoring.
- ▶ High lifetime, high safety and reliability.
- ▶ Can be personalized customization
- ▶ Excellent after-sales service system
- ▶ Excellent cost performance

MAIN APPLICATION

- ▶ Laser cutting
- ▶ Laser welding
- ▶ Laser cladding
- ▶ Laser brazing
- ▶ Laser thermolizing

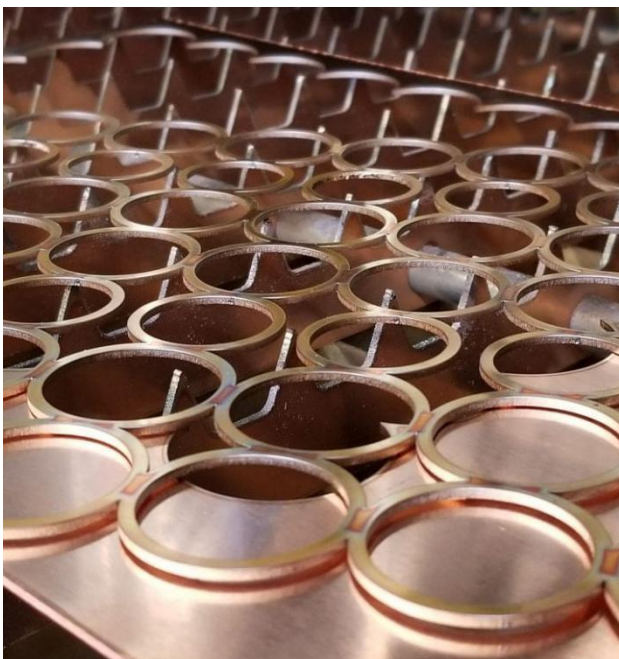

TECHNIQUE INDEX

Performance		Min.	Typ.	Max.	Remarks		
Optic Feature	Central wavelength	(nm)	1070	1080	1090		
	Spectral bandwidth	(nm)		3	5	-3dB	
	Output optical power	CYL-1000/H	(W)		1000		
		CYL-1500/H			1500		
		CYL-2000/H			2000		
		CYL-3000/H			3000		
	Short-term power stability	(%)	±1				
	Long-term power stability	(%)	±2				
	Laser turn-on time	(μs)	50~100				
	Laser off time	(μs)	100~200				
	Power adjustment range	(%)	10		100		
	Beam quality	(M2)			1.3	QBH-25/400	
	Modulation frequency	(KHz)	5		20	100% output	
Red light power	(mW)	5		60			
Output Feature	Output connector			QBH	Customizable		
	Output fiber core-diameter	(μm)		25			
	Output fiber length	(m)		15	Customizable		
	Output fiber bending radius	(mm)	200				
	Work mode		Continuous / modulation			CW/Modulate	
	State of polarization		Random			Random	
Electrical cooling Feature	Communication interface		RS232 / AD / Super terminal				
	Remote telecommunication		APP			Customizable	
	Power supply	(V)		220			
	Power consumption	CYL-1000/H	(KW)			3.0	Single-phase three-wire
		CYL-1500/H				4.5	
		CYL-2000/H				6.0	Two sets 220V
		CYL-3000/H				8.5	
	Cooling mode		Water cooling			Circumscribed	
	Coolant temperature	(°C)	20		28		
	Coolant flow	CYL-1000/H	(L/min)		10		
CYL-1500/H				20			
CYL-2000/H				25			
CYL-3000/H				40			
General Feature	Working environment temperature	(°C)	10		40		
	Working environment humidity	(%)	10		85		
	Storage temperature	(°C)	-10		60		
	Structure		Rack				
	Weight/Size	CYL-1000/H	(kg)	38	(W) × (L)	486.2(440)×451×104	
		CYL-1500/H		40	(contain	486.2(440)×451×104	
		CYL-2000/H		43.4	the handles)	486.2(440)×596×111	
CYL-3000/H		53		× (H)(mm)	486.2(440)×666×111		

ORDER INFORMATION

C
Y
L

/
H

Q
B
H

/

C	Continuous wave	Y	YDF 1.0 μm	Optical fiber laser	Output powers		Mode group		Output connector		Output fiber core-diameter		Fiber length	
					500	500W	S	Single	QBH	QBH	020	20/400	15	15m
P	Puls	E	EDF EYDF 1.5 μm		1000	1000W	M	Multi-mode	LOC	LOC	025	25/400	20	20m
					1500	1500W	H	High brightness anti-high reflection	QCS	QCS	050	50/360	XX	Customize
					2000	2000W					100	100/360		
					3000	3000W					150	150/360		