

CYL-1000/S 1.0 μ M Single-Mode Group Continuous Fiber Laser

› PRODUCT FEATURE AND SPECIFICATIONS:



- High wall plug efficiency, greatly reduce power consumption
- Strong capability on resisting high-reflective, suitable for different materials processing.
- Remote real-time monitoring.
- High lifetime, high safety and reliability.
- Can achieve personalized customization.
- Excellent after-sales service system.
- Excellent cost performance

- Laser cutting.
- Laser welding.
- Laser cladding.
- Laser brazing.
- Laser thermolizing.

CINA LASER's CYL-1000/S 1.0μm single-mode group continuous fiber laser, adopts latest industry technology and the optimization design, with high electro-optical conversion efficiency, high lifetime, high safety and reliability. The unit with high-quality output beam and strong capability on resisting high-reflective, can be widely used in all kinds of materials of laser cutting, welding, punching, 3D printing and other high-end smart manufacturing.


CINA LASER, which is based on Internet technology, established a scientific after-sales service system. Each device has a unique identity code (the internal storage of original technology and material information). Can achieve remote online real-time monitoring; can provide users with equipment fault early warning and efficient technical support and good after-sales service.

CINA LASER's products with high quality, high reliability and excellent cost performance, can meet the requirements of the customer diversification and personalized customization. It also with good after-sales service, is the ideal choice for system integrates and equipment manufacturers.

Performance	Unit	Min.	Typ.	Max.	Remarks
Central Wavelength	(nm)	1070	1080	1090	
Spectral Bandwidth	(nm)		3	5	-3db
Output Optical Power	(W)		1000		
Short Time Power Stability	(%)		±1		
Long Time Power Stability	(%)		±2		
Laser Opening Time	(ms)		50~100		
Laser Shutdown Time	(ms)		100~200		
Power Regulation Range	(%)	10		100	
Beam Quality	(M2)			1.2	QBH-20、25
Fiber Numerical Aperture (Na) Half Angle	(Rad)			0.065	QBH-20、25
Modulation Frequency	(KHz)	5		20	100% Output
Red Light Power	(mw)	5		60	
Output Connector			Qbh		
Output Fiber Core Diameter	(mm)		20		Customizable
Output Fiber Length	(m)		10	15	Customizable
Output Cable Bending Radius	(mm)	200			
Work Model			Continuous/Modulation		Cw/Modulate
State Of Polarization			Random		Random
Communication Interface			Rs232/Ad /Super Terminal		
Remote Communication			App		Customizable
Power Supply	(V)		220		
Power Consumption	(KW)			3.0	220 V, Single-Phase Three-Wire
Cooling Mode			Water Cooling		External
Cooling Water Temperature	(°C)	21		25	
Cooling Water Flow	(L/Min)		10		
Working Ambient Temperature	(°C)	10		40	
Working Environment Humidity	(%)	10		85	
Storage Temperature	(°C)	-10		60	
Structure					Rack
Weight/Dimensions	(Kg)	16.5	(W)With Handle×(L) With Handle ×(H) (mm)		402(365) x 341(311) x 69

CYL-1000/S 1.0 μ M Single-Mode Group Continuous Fiber Laser

› DIMENSIONS

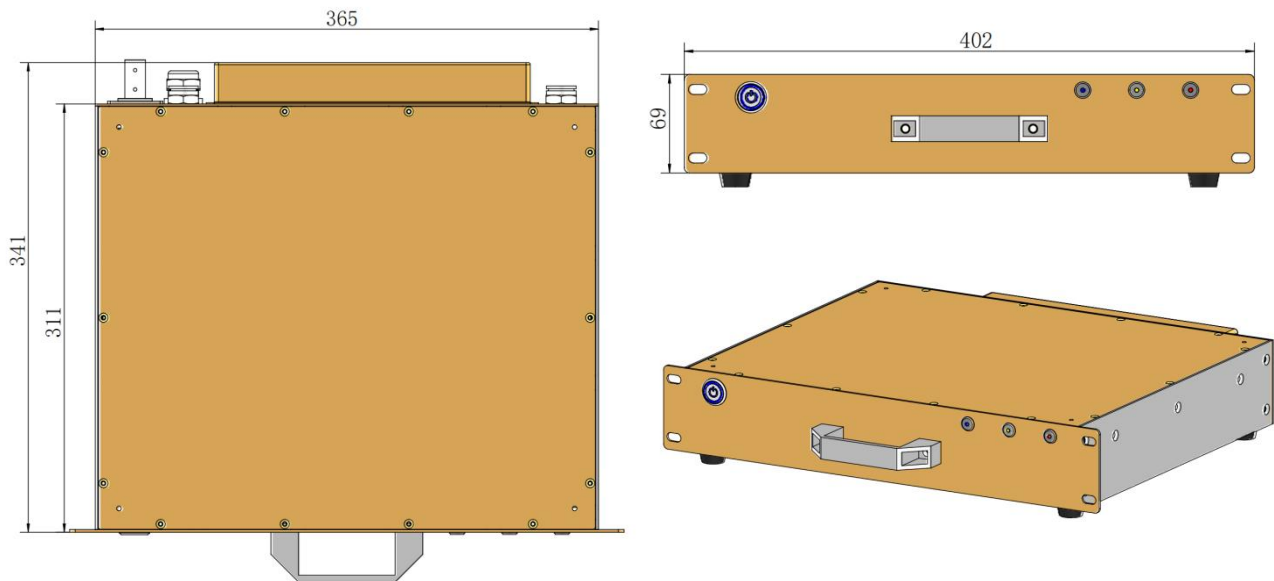

› ORDER INFORMATION

C
Y
L
 -

 / S
 - Q
B
H
 -

 /

C	CW	Y	YDF 1.0μm	Fiber laser	Output power		Mode		Output connector		Output fiber core diameter		Fiber length	
					500	500W	S	Single	QBH	QBH	20	20/400	15	15m
Q	QCW	E	EDF EYDF 1.5μm		1000	1000W	M	Multi	LOC	LOC	25	25/400	20	20m
P	PULSE				1500	1500W	H	Anti-high reflection	QCS	QCS	50	50/360	XX	Custom izable
					2000	2000W							100	100/360
					3000	3000W							150	150/360

**DANGER - INVISIBLE LASER
 RADIATION AVOID EYE OR SKIN
 EXPOSURE TO DIRECT OR
 SCATTERED RADIATION
 CLASS 4 LASER PRODUCT**