

## CYL-500/S 1.0 μ M Single-Mode Group Continuous Fiber Laser

### › PRODUCT FEATURE AND SPECIFICATIONS:



- High wall plug efficiency, greatly reduce power consumption
  - Remote real-time monitoring.
  - High lifetime, high safety and reliability.
  - Can achieve personalized customization.
  - Excellent after-sales service system.
  - Excellent cost performance
- 
- Laser cutting.
  - Laser welding.
  - Laser cladding.
  - Laser brazing.
  - Laser thermolizing.
  - Laser additive manufacturing
  - Solar plant automation


CINA LASER CYL-500/S 1.0μm single-mode group continuous fiber laser, adopts latest industry technology and the optimization design, with high electro-optical conversion efficiency, high lifetime, high safety and reliability. The unit with high-quality output beam and strong capability on resisting high-reflective, can be widely used in all kinds of materials of laser cutting, welding, punching, Metal 3D printing and other high-end smart manufacturing.

CINA LASER, which is based on Internet technology, established a scientific after-sales service system. Each device has a unique identity code (the internal storage of original technology and material information). Can achieve remote online real-time monitoring; can provide users with equipment fault early warning and efficient technical support and good after-sales service.

Performance		Min.	Typ.	Max.	Supplement
Central Wavelength	(nm)	1070	1080	1090	
Spectral Bandwidth	(nm)		3	5	-3dB
Output Optical Power	(W)		500		
Power Adj. Range	(%)	10		100	
Output Power Stability	(%)		1	1.5	100% continuous > 1h
			2	3	100% continuous > 24h
Beam Quality	(M <sup>2</sup> )			1.3	QBH-20/400
				2.8	QBH-50/360
Modulation Frequency.	(KHz)			20	100% output
Glow Power	(mW)	0.3		1.0	
Output Connector			QBH		Customize
Output Fiber Core-Diameter	(μm)		20	100	
Output Fiber Length	(m)		15		Customize
Output Fiber Bending Radius	(mm)	200			
Working Mode		Continuous modulation			CW/Modulate
Polarization State		Random			Random
Telecommunication Port		RS232 / AD / Super terminal			
Remote Telecommunication		APP			Customize
Power Supply	(V)	220			Two phase three wire
Power Consumption	(KW)				3.0
Cooling Method		Water-cooling			Circumscribed
Coolant Temp.	(°C)	21		25	
Coolant Flow	(L/min)		10		
Working Environment Temp.	(°C)	10		40	
Working Environment Humidity	(%)	10		85	
Storage Temp.	(°C)	-10		60	
Weight	(kg)	16.5			
Structure					Rack
Dimensions (W) × (L) × (H)	(mm)	(W)with Handle×(L) with Handle ×(H) (mm)			402(365) x 341(311) x 69

## CYL-500/S 1.0 μ M Single-Mode Group Continuous Fiber Laser

### › DIMENSIONS

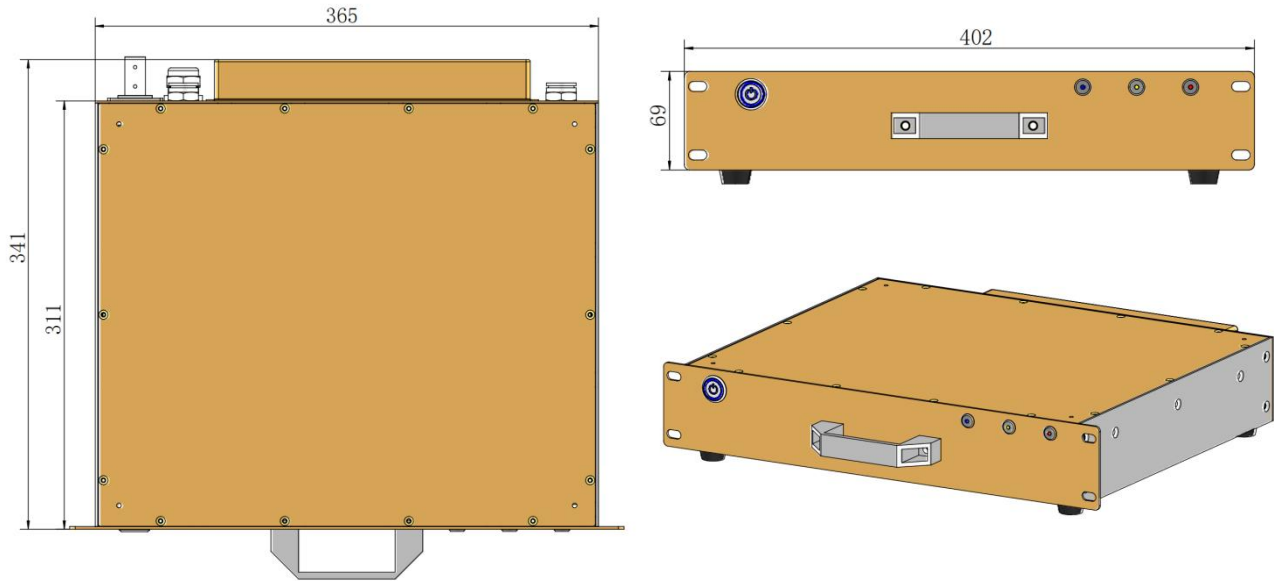

### › ORDER INFORMATION

C
Y
L
 
 
 
 
/
S
 
Q
B
H
 
 
 
/
 
 

C	CW	Y	YDF 1.0μm	Fiber laser	Output power		Mode		Output connector		Output fiber core diameter		Fiber length	
					500	500W	S	Single	QBH	QBH	20	20/400	15	15m
Q	QCW	E	EDF EYDF 1.5μm		1000	1000W	M	Multi	LOC	LOC	25	25/400	20	20m
P	PULSE				1500	1500W	H	Anti-high reflection	QCS	QCS	50	50/360	XX	Custom izable
					2000	2000W					100	100/360		
					3000	3000W					150	150/360		

DANGER - INVISIBLE LASER  
RADIATION AVOID EYE OR SKIN  
EXPOSURE TO DIRECT OR  
SCATTERED RADIATION  
CLASS 4 LASER PRODUCT